

OKKIO

design U.T. EGOLUCE

Faretto orientabile da incasso in nickel satinato, completo di dissipatore. Con lente interna in policarbonato per luce puntuale (15°). Alimentato a 350mA (1W).

ALIMENTATORE NON INCLUSO.

Adjustable recessed spotlight in nickel matt version. Heat sink included.

Lens inside for point spotlight effect (15°). Available for use with converter 350mA (1W). CONVERTER NOT INCLUDED.


Spot encastré orientable en nickel satiné avec dissipateur de chaleur. Avec lentille en polycarbonate pour une lumière pointue (15°). Alimentation à 350mA (1W).

ALIMENTATEUR PAS INCLU

Schwenkbarer Einbaustrahler, mit optischer Linse aus Polykarbonat für Punktlicht (15°).



Kühlkörper inbegriffen. Versorgung 350 mA (1W) KONVERTER NICHT INBEGRIFFEN.



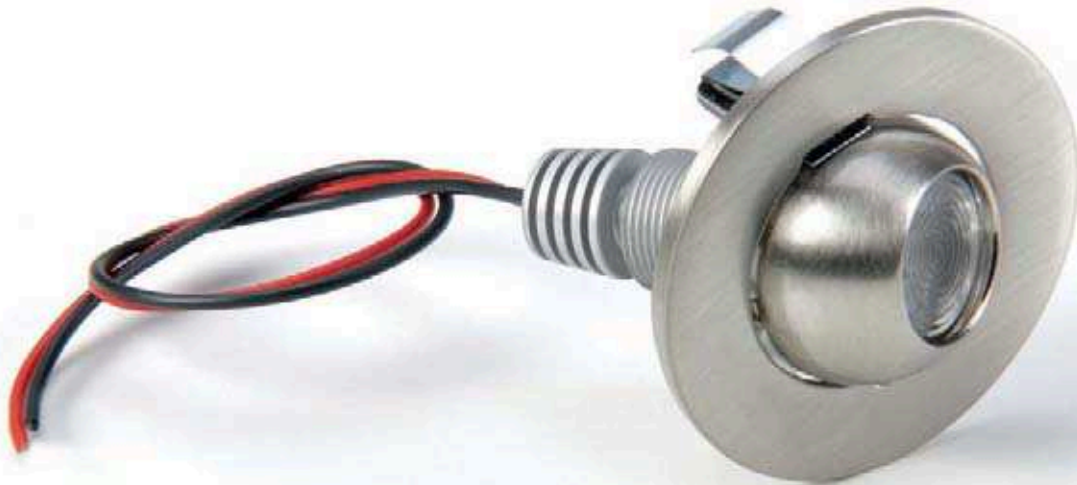

OKKIO 6324

350 mA(1W) - 3700° K			
		IP40	4,5 cm.
.32			

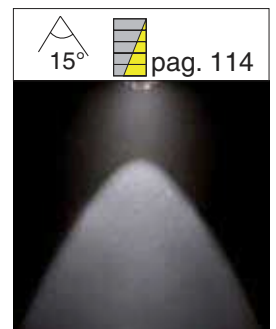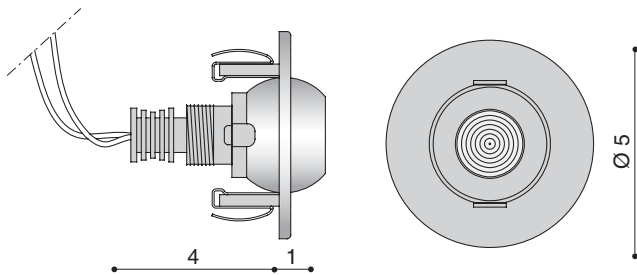

pag. 110



SOLO COLLEGAMENTO IN SERIE - ONLY SERIAL CONNECTION - ESCLUSIVEMENT MONTAGE EN SERIES - NUR SERIENVERBINDUNG - pag. 112

